


TOLERANCE & DIMENSIONS UNLESS SPECIFIED	
Fractions ±	Angles ±
Decimals ±	Draft
Holes ±	Break Corners

RELEASED FOR PRODUCTION  
Date \_\_\_\_\_  
MAKE NO CHANGE  
WITHOUT ENGR. APPROVAL  
Do Not Scale Drawing

SCALE  
1 X  
Dimensions  
In Inches

TITLE ROOM THERMOSTAT  
SINGLE DA OUTPUT W/ INTEGRAL  
ACTION & VELOCITY LIMITS



PART NO.  
CTE-5015-XX  
EX. DWG. NO. B

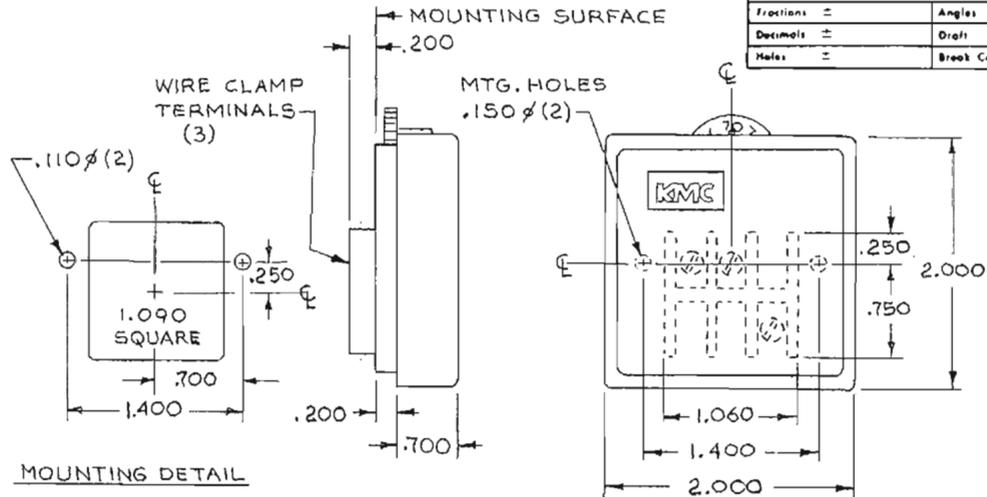

SPECIFICATIONS

SUPPLY VOLTAGE : 14 TO 18 VDC (3.5 mA)  
 OUTPUT RANGE : 2 TO 10 VDC  
 SETPOINT RANGE : 55 - 90°F (12 - 32°C)  
 PROPORTIONAL BAND : 4°F (2.2°C)  
 INTEGRAL TIME : 30 MINUTES  
 MOUNTING SCREWS INCLUDED : 6-20 X 5/8 SELF THREADING (2)  
 MOUNTING PLATES : AVAILABLE TO FIT US OR UK SWITCH BOXES  
 TERMINAL B : COMMON ⊥  
 TERMINAL C : SUPPLY INPUT  
 TERMINAL D : OUTPUT

SEQUENCE

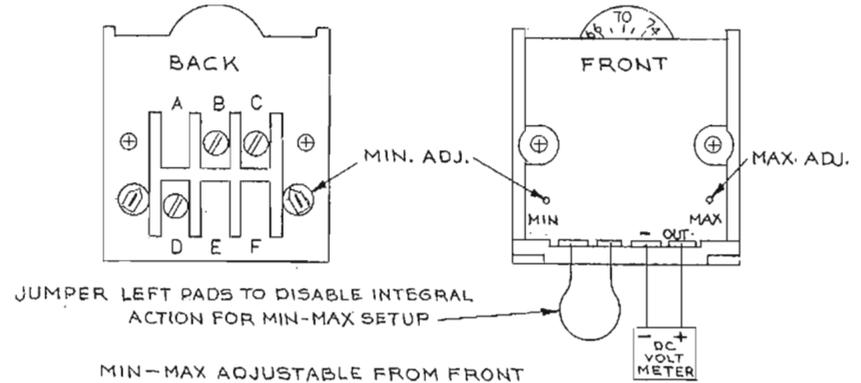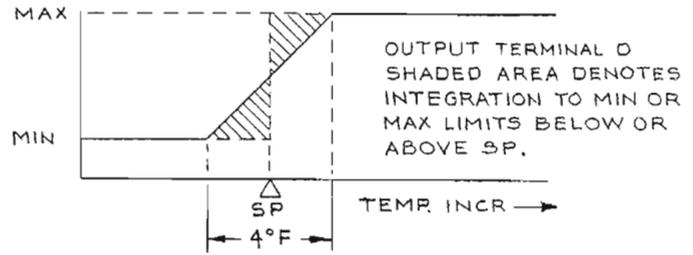

MIN-MAX ADJUSTABLE FROM FRONT OR BACK. TURN SETPOINT FULL HIGH. ADJUST MIN FIRST. TURN SETPOINT FULL LOW. ADJUST MAX SECOND. RETURN SETPOINT AND REMOVE JUMPER.

MODEL	COVER	COLOR	SCALE
CTE-5015-10	KMC	LT. ALMOND	°F
CTE-5015-11	KMC	LT. ALMOND	°C
CTE-5015-W10	KMC	WHITE	°F
CTE-5015-W16	BLANK	WHITE	°F

MATERIAL		<b>KREUTER MANUFACTURING CO., INC.</b>			B CTE-5015-XX WAS 5015-11 ADD. TAB. 6-24-03 PPK A -10/-11 ADDED 2-27-02 LSS
By	LSS				
Date	8/28/02			Let.	REVISIONS
					Date
					By